


QuadCore[®] KS1000 RW Product Data Sheet

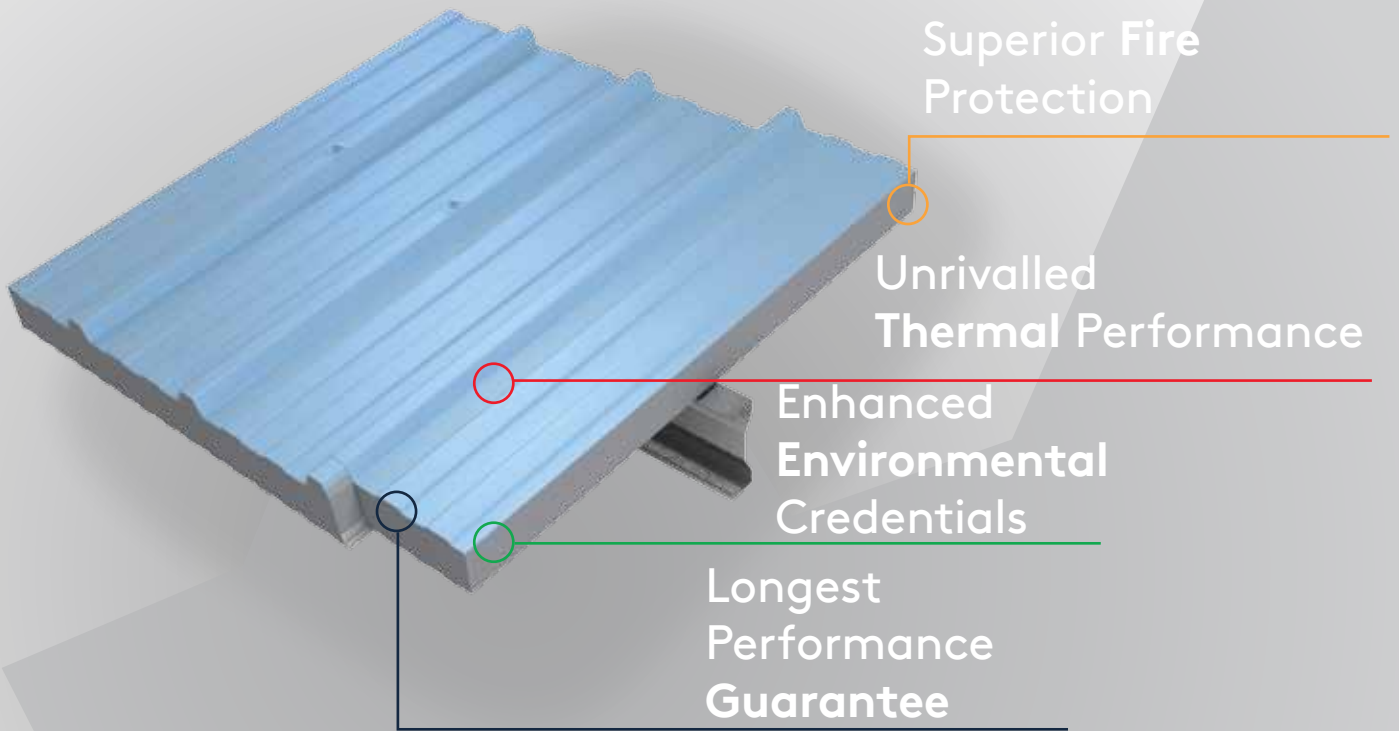


Superior Fire
Protection

Unrivalled
Thermal Performance

Enhanced
Environmental
Credentials

Longest
Performance
Guarantee

Cross section

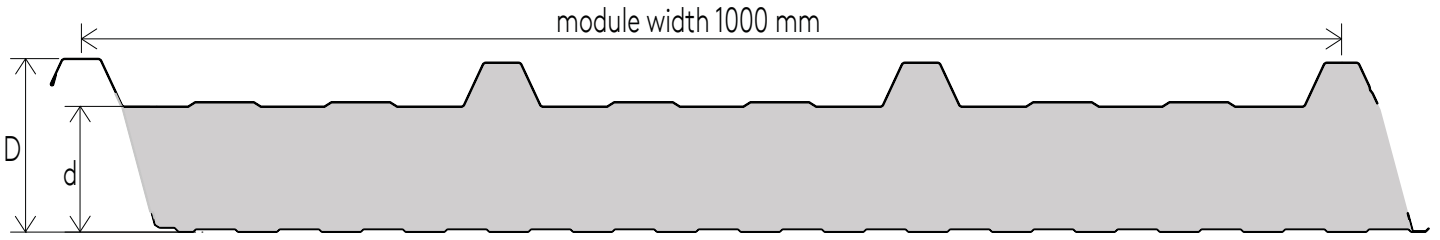


Application

The KS1000 RW is a trapezoidal formed roof system with a standard fastening method (through fixed), which is suitable for all building applications, with a roof slope:

- more than 4° (7%) for roofs with one panel in the slope direction;
- more than 6° (10%) for roofs with end lapping (two or more panels in slope direction).

The application of panel should be verified for each project individually, in order to meet the design requirements.

Joint detail

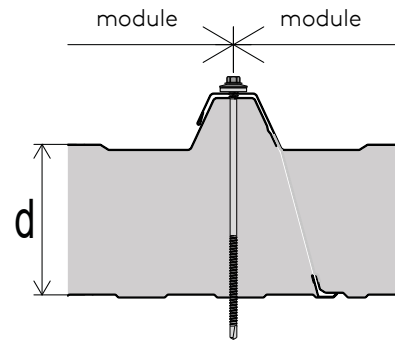



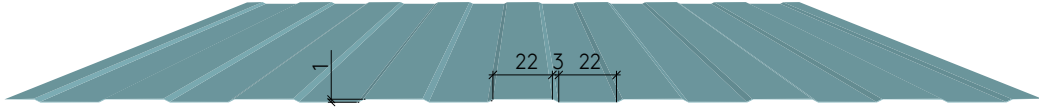

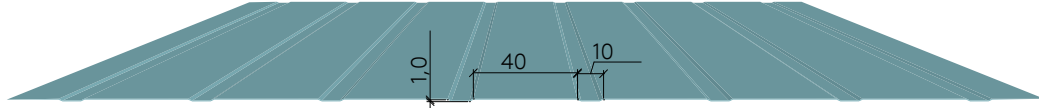

Technical details

Product	Module [mm]	Insulation core thickness d/D [mm]	Weight [kg/m ²]	Panel lengths ⁽²⁾ [m]		Number of panels in bundle [pcs]	Heat transfer coefficient U _{d,s} [W/(m ² K)]	Sound reduction index R _w [dB]	Fire parameters	
				Min. ⁽¹⁾	Max.				Reaction to fire	Fire resistance
KS1000 RW	1000	80/115	11,27	5,0	15,0	10	0,23	25	B-s1,d0	REI 20 / RE 60
		100/135	12,20			9	0,19			
		120/155	12,96			8	0,16	26		REI 30/ RE 60 ⁽³⁾ REI 20/ RE 60
		160/195	14,48	6	0,12					
		200/235	16,03	4,0	5	0,09	-			


Note:

- 1) At the request of the ordering party (for an additional fee) it is possible to deliver shorter panels. In other cases, short sections are combined in length meeting the production requirements.
- 2) All panels are manufactured with factory made endlaps (included in total length). Dimension of cutback: 50-350 mm; 50-630 mm; Cut Back orientation: left or right.
- 3) Contact Kingspan for more information.

Technical data

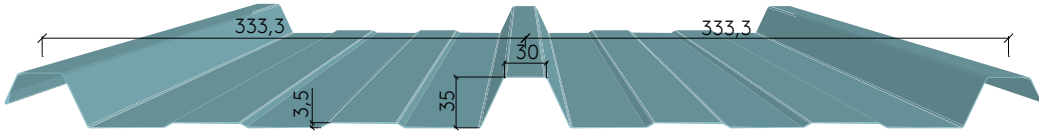Profiliation	Geometry - dimensions in [mm]	Exterior	Interior
T (Trapez)			
Q (Minibox 22)			
B (Box)			





 standard

 on request







Material

- **Exterior/Interior facings:** - Hot-dip zinc coated steel with a total of 275 g/m² of zinc, according to EN 14509; - austenitic stainless steel type 1.4301 according to EN 10 088;
- **Insulation core:** rigid **QuadCore™** polyisocyanurate foam with closed cell structure;

Exterior coating options

- **Poliester SP25 – (Kingspan PES)** - corrosivity category up to C3; 
- **PVD(F) 2 layers – (Kingspan PVD(F) 2 layers)** - corrosivity category up to C3¹⁾; 
- **PVD(F) 3 layers – (Kingspan PVD(F) 3 layers)** - corrosivity category up to C3¹⁾; 
- **PUR55 – (Kingspan Spectrum)** - corrosivity category up to C4²⁾; 

Interior coating options

- **Poliester SP15 – (Kingspan PEI)** - corrosivity category up to C1; 
- **Poliester SP25 – (Kingspan PES)** - corrosivity category up to C3; 
- **PVD(F) 2 layers – (Kingspan PVD(F) 2 layers)** - corrosivity category up to C3¹⁾; 
- **PVD(F) 3 layers – (Kingspan PVD(F) 3 layers)** - corrosivity category up to C3¹⁾; 
- **FoodSafe PVC(F) (Kingspan FoodSafe)** - corrosivity category up to C5-I; 
- **PUR55 – (Kingspan Spectrum)** - corrosivity category up to C4¹⁾; 

1) Corrosion resistance category up to C4 on special order; to be confirmed by Kingspan's Quality Control Department.
 2) Corrosion resistance category up to C5-I, M on special order; to be confirmed by Kingspan's Quality Control Department.

Reference documents

KS1000 RW sandwich panels are manufactured in accordance with the EN 14 509 and CE marked. Kingspan provides insurer solutions tested in accordance with FM requirements.


Quality

Kingspan insulating sandwich panels are made from the highest quality materials, using the latest manufacturing technology, meet the stringent quality control requirements, meet ISO 9001:2015 standards and guarantee long service life and reliability.

Guarantees & Warranties

The Kingspan guarantees are individually assessed for each project, especially depending on the aggressiveness of the environment and the type of surface treatment chosen.

Cut Back - KS1000 RW with QuadCore insulation core:

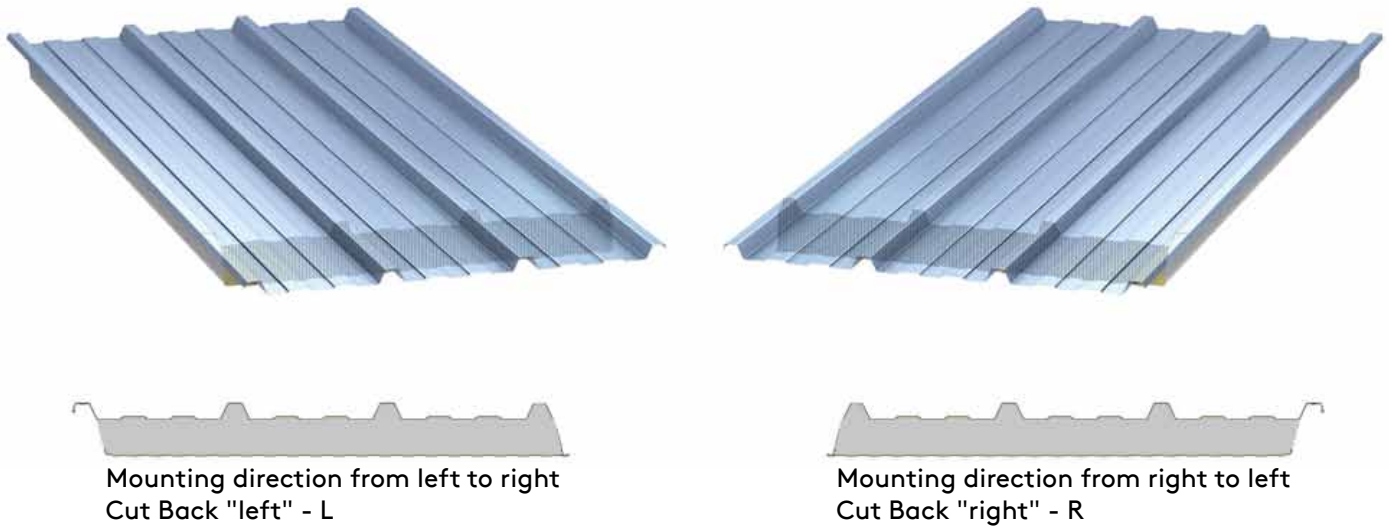

KINGSPAN STANDARD COLORS - EXTERIOR SIDE

Exterior coat types (for galvanized steel)	Polyester (PES) – 25µm	R9010	R9002	R9006	R9007
		R7012	R7016	The colors are only illustrative in nature and may differ from the actual ones.	
Standard interior colors for KS1000 RW panels are R9010 PES or R9002 PES					

Other colors from otherpalettes are also available on request, after prior consultation with Kingspan.

Kingspan AB
 Prytzgatan 6
 431 31 Mölndal
 Tel. +46 (0)31 760 26 99
 E-mail: info@kingspan.se



Information about the product offer in others countries can be obtained from your local sales representative or on the website www.kingspan.com

Although Kingspan makes every effort to provide information contained in this publication were as accurate as possible, correct and complete, please note that its content should not be the basis of the procedure in any particular case. Any advice, opinions, information or other content is published solely based on the principle that neither the company, its employees or representatives, or people who contributed to the uprising of this publication, do not assume any liability for its content or any damage caused in connection with this content.

