

# KINGSPAN BREAK FORM TRIMS

## DISCLAIMERS:

TO ENSURE YOU ARE VIEWING THE MOST RECENT AND ACCURATE PRODUCT INFORMATION, PLEASE VISIT [WWW.KINGSPANPANELS.US](http://WWW.KINGSPANPANELS.US) OR [WWW.KINGSPANPANELS.CA](http://WWW.KINGSPANPANELS.CA).

CARE HAS BEEN TAKEN TO ENSURE THAT THE CONTENTS OF THIS PUBLICATION ARE ACCURATE, BUT KINGSPAN AND ITS SUBSIDIARY COMPANIES DO NOT ACCEPT RESPONSIBILITY FOR ERRORS OR FOR INFORMATION THAT IS FOUND TO BE MISLEADING. SUGGESTIONS FOR, OR DESCRIPTION OF, THE END USE OR APPLICATION OF PRODUCTS OR METHODS OF WORKING ARE FOR INFORMATION ONLY AND KINGSPAN LIMITED AND ITS SUBSIDIARIES ACCEPT NO LIABILITY IN RESPECT THEREOF.

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

COMMERCIAL/INDUSTRIAL  
DISCLAIMER

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 2

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

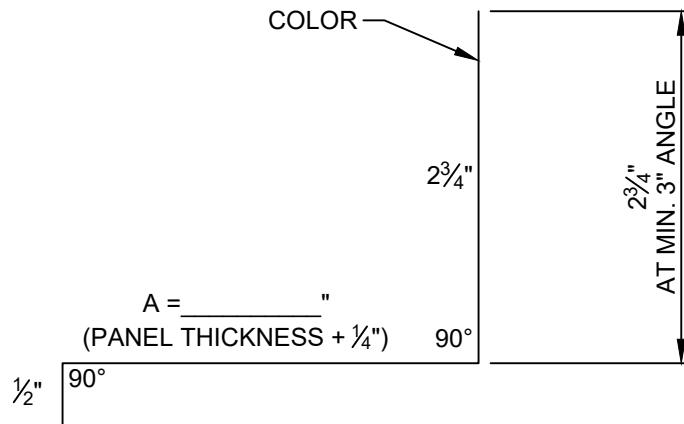

TRIM DIMENSION

| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
|-----------------|----------|-------------|
| 2"              | 2 1/4"   | 5 1/2"      |
| 2 1/2"          | 2 3/4"   | 6"          |
| 3"              | 3 1/4"   | 6 1/2"      |
| 4"              | 4 1/4"   | 7 1/2"      |
| 5"              | 5 1/4"   | 8 1/2"      |
| 6"              | 6 1/4"   | 9 1/2"      |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-BS-02-KSV CS-TL-01-KSV  
CS-BS-03-KSV

REVISION

| REVISION # | DATE    |
|------------|---------|
| 0          | 5/31/24 |

BASE FLASHING

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 2

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

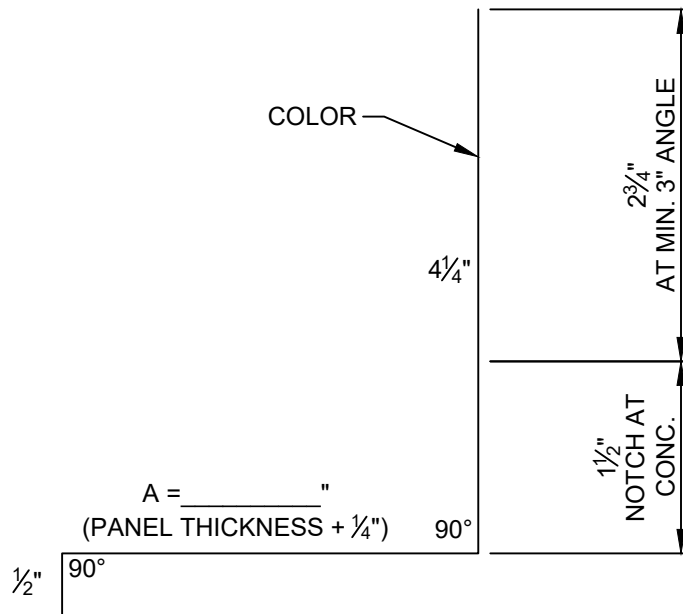

TRIM DIMENSION

| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
|-----------------|----------|-------------|
| 2"              | 2 1/4"   | 7"          |
| 2 1/2"          | 2 3/4"   | 7 1/2"      |
| 3"              | 3 1/4"   | 8"          |
| 4"              | 4 1/4"   | 9"          |
| 5"              | 5 1/4"   | 10"         |
| 6"              | 6 1/4"   | 11"         |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

BASE FLASHING

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

www.kingspanpanels.com



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 5.375"

QUANTITY OF BREAKS: 8

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

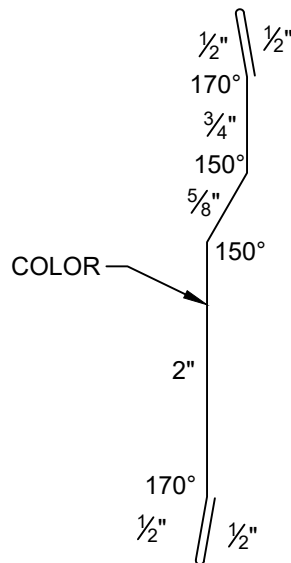

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-BS-01-KSV  
CS-BS-02-KSV  
CS-BS-03-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

BASE TRIM

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 5.75"

QUANTITY OF BREAKS: 9

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

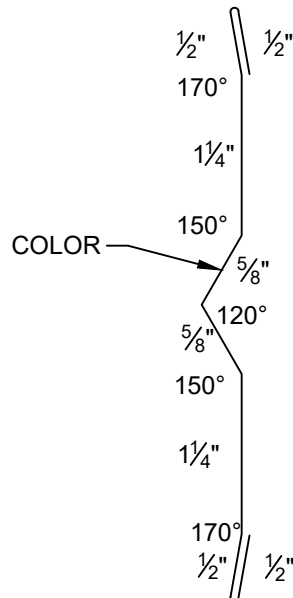

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-ST-01-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

STACK TRIM

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 9

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

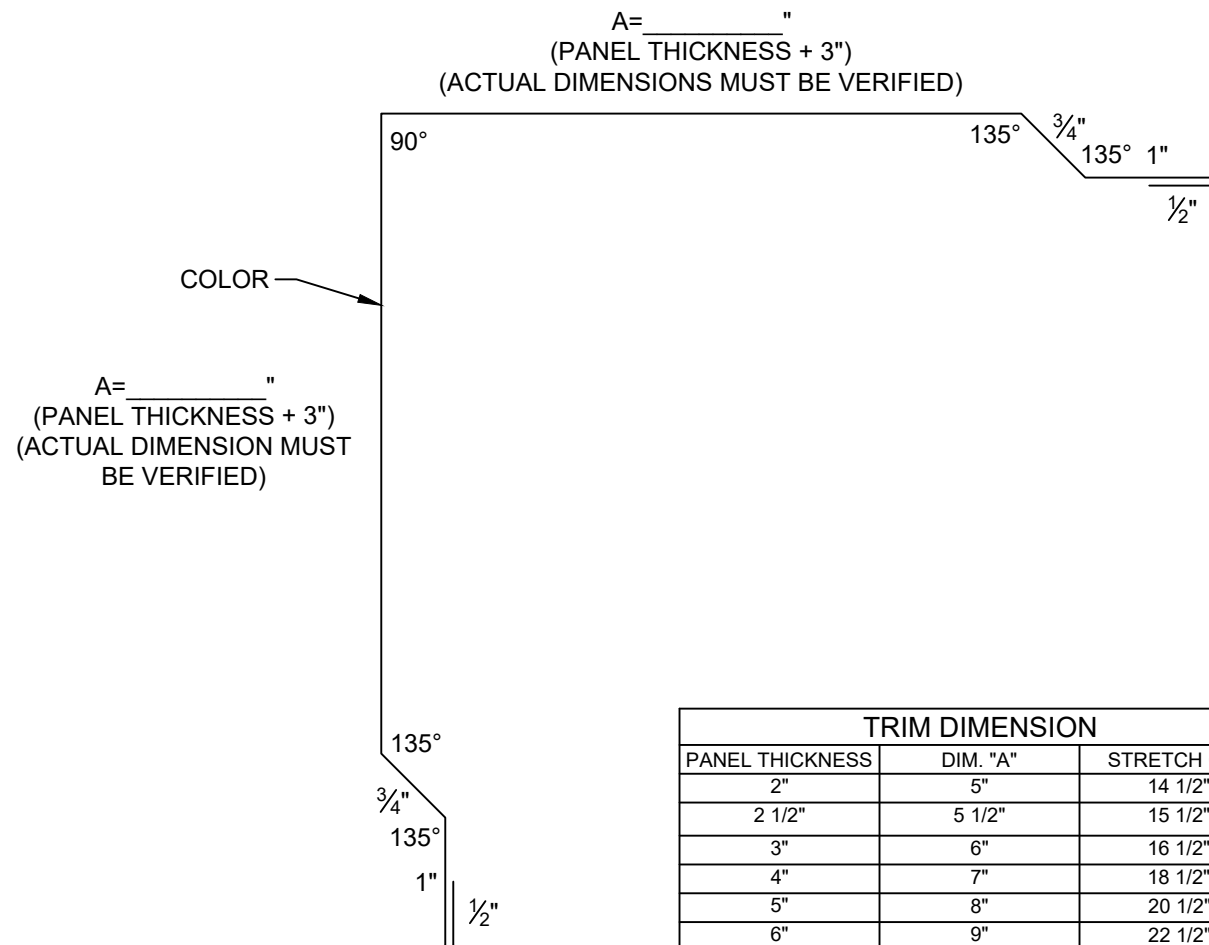

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-OC-01-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

OUTSIDE CORNER

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

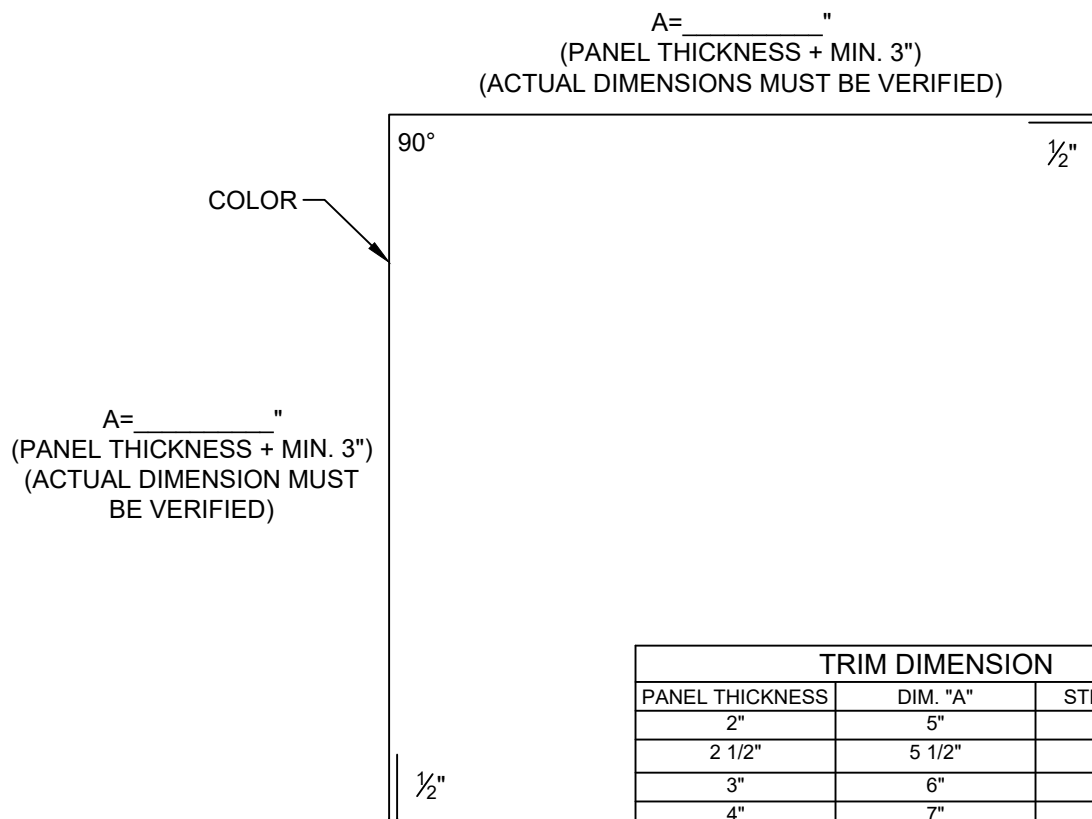

| TRIM DIMENSION  |          |             |
|-----------------|----------|-------------|
| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
| 2"              | 5"       | 11"         |
| 2 1/2"          | 5 1/2"   | 12"         |
| 3"              | 6"       | 13"         |
| 4"              | 7"       | 15"         |
| 5"              | 8"       | 17"         |
| 6"              | 9"       | 19"         |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-OC-02-KSV CS-CE-01-KSV  
CS-IC-01-KSV CS-CE-03-KSV  
CS-IC-02-KSV  
CS-IC-03-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

OUTSIDE CORNER

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 8.50

QUANTITY OF BREAKS: 9

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

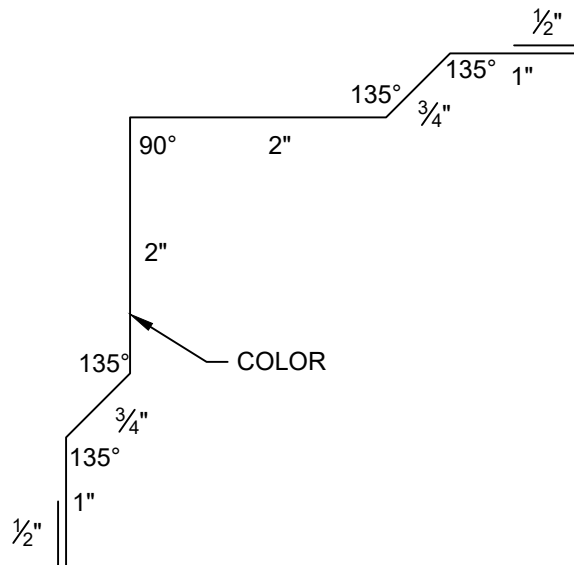

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-IC-01-KSV  
CS-CE-11-KSV  
CS-HC-03-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

INSIDE CORNER

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 7.0"

QUANTITY OF BREAKS: 5


QUANTITY REQUIRED: AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

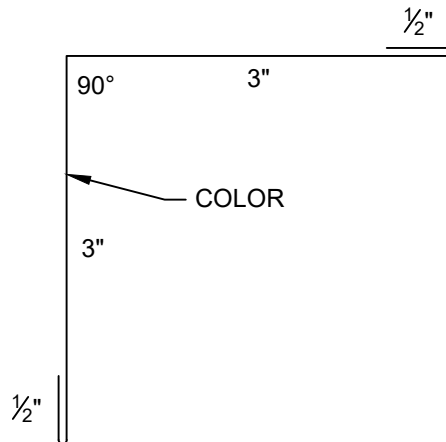

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

|              |              |              |
|--------------|--------------|--------------|
| CS-IC-01-KSV | CS-OC-01-KSV | CS-CE-11-KSV |
| CS-IC-02-KSV | CS-OC-02-KSV | CS-CE-12-KSV |
| CS-IC-03-KSV | CS-OC-03-KSV | CS-CE-13-KSV |
| CS-IC-04-KSV | CS-OC-04-KSV | CS-CE-14-KSV |
|              | CS-OC-05-KSV |              |

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

INSIDE CORNER

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

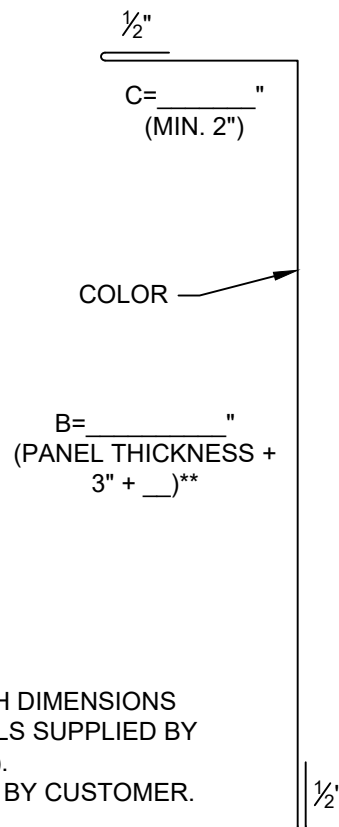

**\*\*NOTE:**

THIS IS A CUSTOM TRIM WITH DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY  
OTHERS (NOT BY KINGSPAN).

TRIM DIMENSIONS MUST BE BY CUSTOMER.

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION  
DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-OC-05-KSV  
CS-CE-03-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

## TRANSITION FLASHING

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

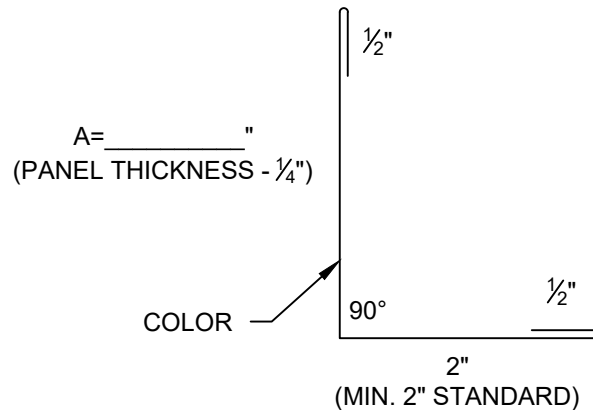

TRIM DIMENSION

| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
|-----------------|----------|-------------|
| 2"              | 1 3/4"   | 4 3/4"      |
| 2 1/2"          | 2 1/4"   | 5 1/4"      |
| 3"              | 2 3/4"   | 5 3/4"      |
| 4"              | 3 3/4"   | 6 3/4"      |
| 5"              | 4 3/4"   | 7 3/4"      |
| 6"              | 5 3/4"   | 8 3/4"      |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-FO-04-KSV

REVISION

| REVISION # | DATE    |
|------------|---------|
| 0          | 5/31/24 |

CAP TRIM

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

www.kingspanpanels.com



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

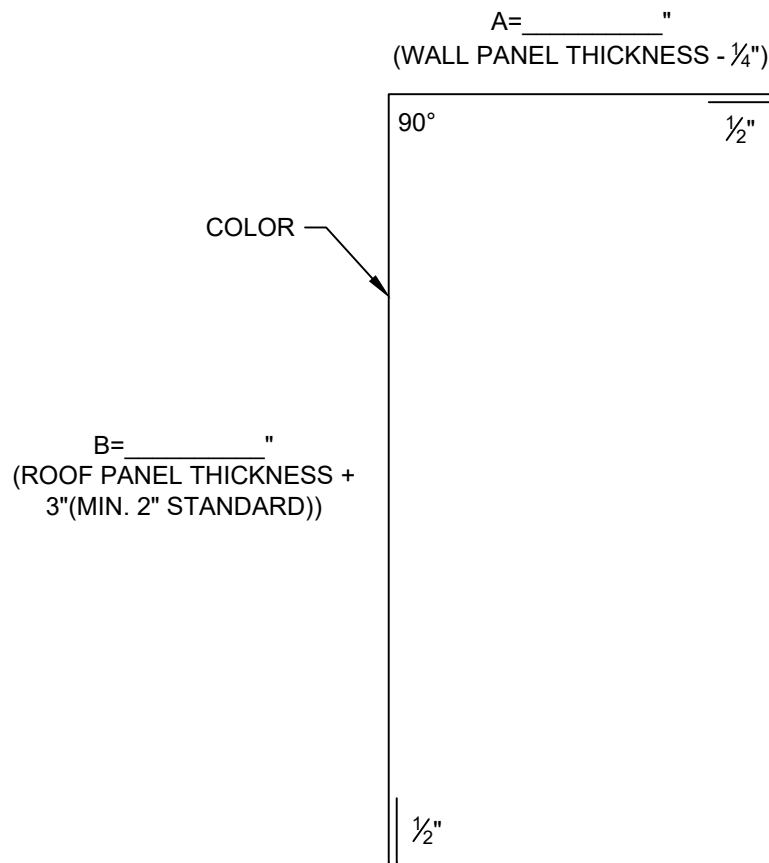

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-HC-03-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

CAP TRIM

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 3.25"

QUANTITY OF BREAKS: 3

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:



TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-BS-05-KSV  
CS-FO-03-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

COVER TRIM /  
BASE TRIM

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 8.50"

QUANTITY OF BREAKS: 8

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSSED ☐ AZTECO EMBOSSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

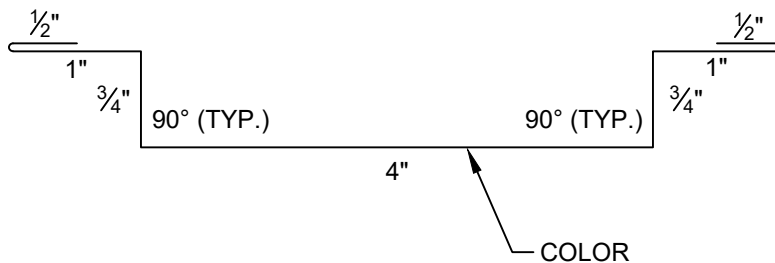

NOTE:  
THIS IS AN OPTIONAL TRIM.

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-CE-05-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

## CAP TRIM

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 11.75

QUANTITY OF BREAKS: 8

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

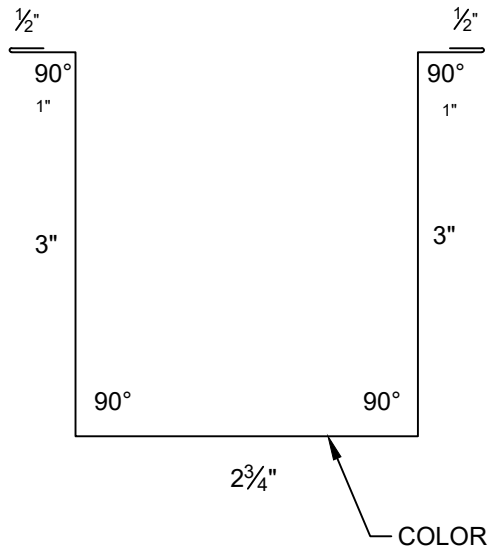

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-IC-04-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

CAP TRIM

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 14.50

QUANTITY OF BREAKS: 8

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

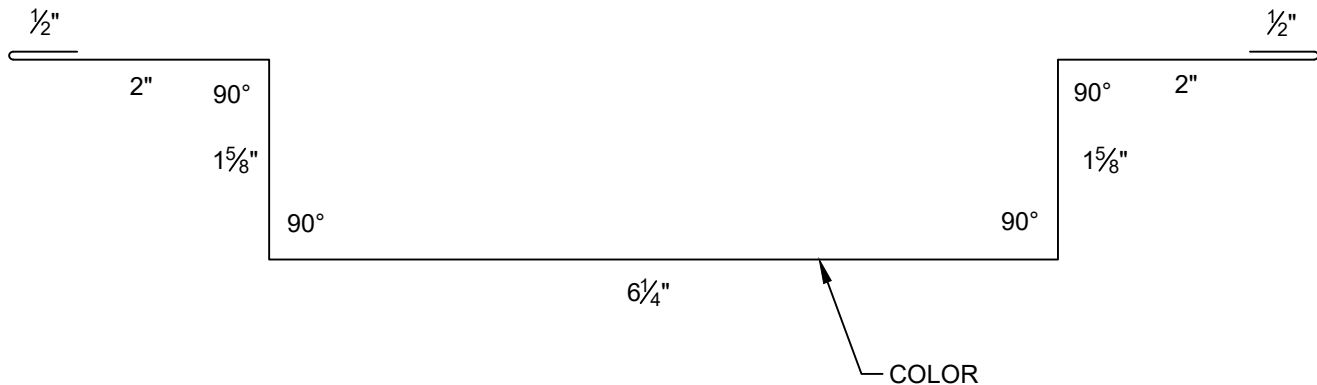

NOTE:  
THIS IS AN OPTIONAL TRIM.

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-CE-06-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

CAP TRIM

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 7.00"

QUANTITY OF BREAKS: 4

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

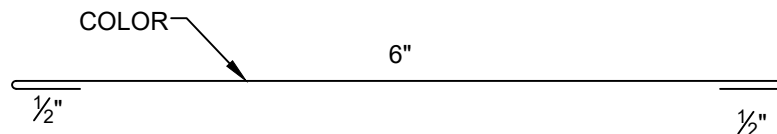

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-CE-01-KSV CS-ST-01-KSV  
CS-CE-06-KSV  
CS-CE-08-KSV  
CS-HC-02-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

**MENDING PLATE  
(TRANSITION FLASHING)**

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 7.375

QUANTITY OF BREAKS: 6

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

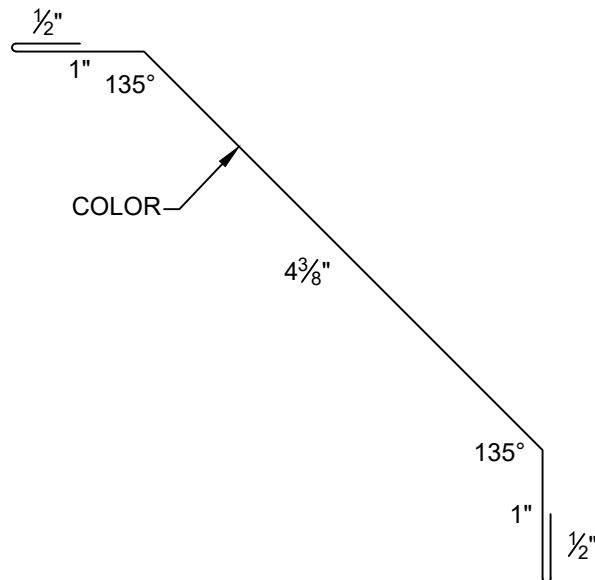

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-CE-01-KSV  
CS-CE-03-KSV  
CS-CE-12-KSV  
CS-CE-14-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

COVER TRIM

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: QUANTITY OF BREAKS: 4


QUANTITY REQUIRED: AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

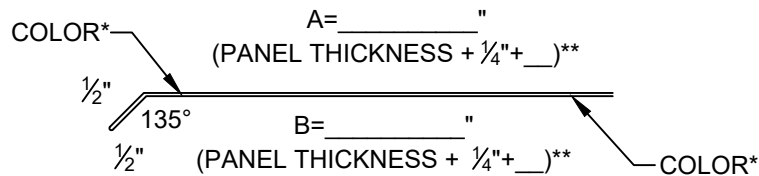

\*TRIM IS DOUBLED OVER FOR COLOR BOTH SIDES

**\*\*NOTE:**  
THIS IS A CUSTOM TRIM WITH DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY  
OTHERS (NOT BY KINGSPAN).  
TRIM DIMENSIONS MUST BE BY CUSTOMER.

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-FO-03-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

HEAD FLASHING

DETAIL #: KS SERIES VERT  
RELEASE: 2024  
REGION: NORTH AMERICA  
www.kingspanpanels.com



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 4

QUANTITY REQUIRED:

AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

A= \_\_\_\_\_"  
(MIN. ½" OR FIELD BREAK  
AS REQUIRED)

B= \_\_\_\_\_"  
(PANEL THICKNESS +  
DOOR/WINDOW  
REQUIREMENTS)

COLOR

**\*\*NOTE:**  
THIS IS A CUSTOM TRIM WITH DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY  
OTHERS (NOT BY KINGSPAN).  
TRIM DIMENSIONS MUST BE BY CUSTOMER.

C= \_\_\_\_\_"  
(MIN. 2")

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-FO-05-KSV

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 0          | 5/31/24 |

JAMB TRIM

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

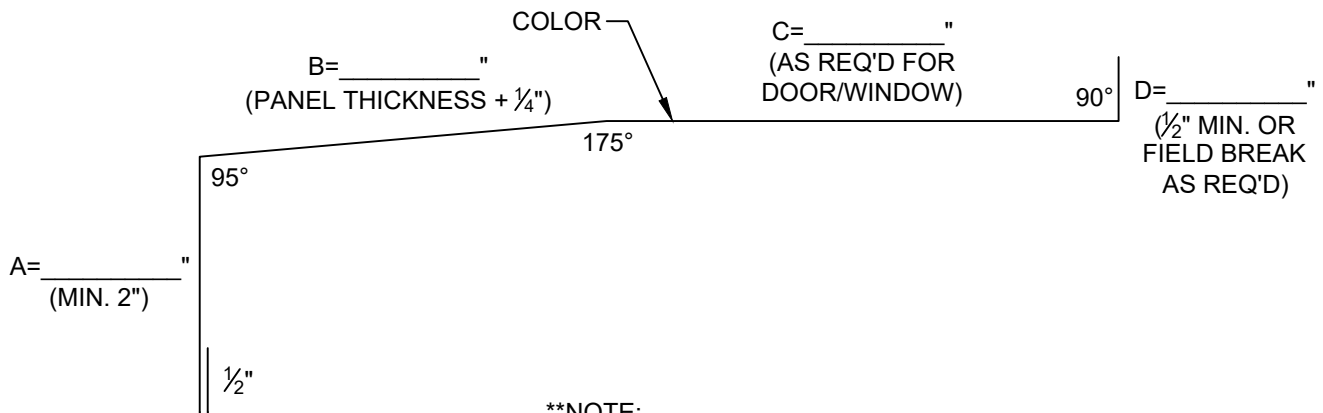

**\*\*NOTE:**

THIS IS A CUSTOM TRIM WITH DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY  
OTHERS (NOT BY KINGSPAN).  
TRIM DIMENSIONS MUST BE BY CUSTOMER.

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION  
DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-FO-06-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

SILL TRIM

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:


AT 10'-0" LENGTH (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

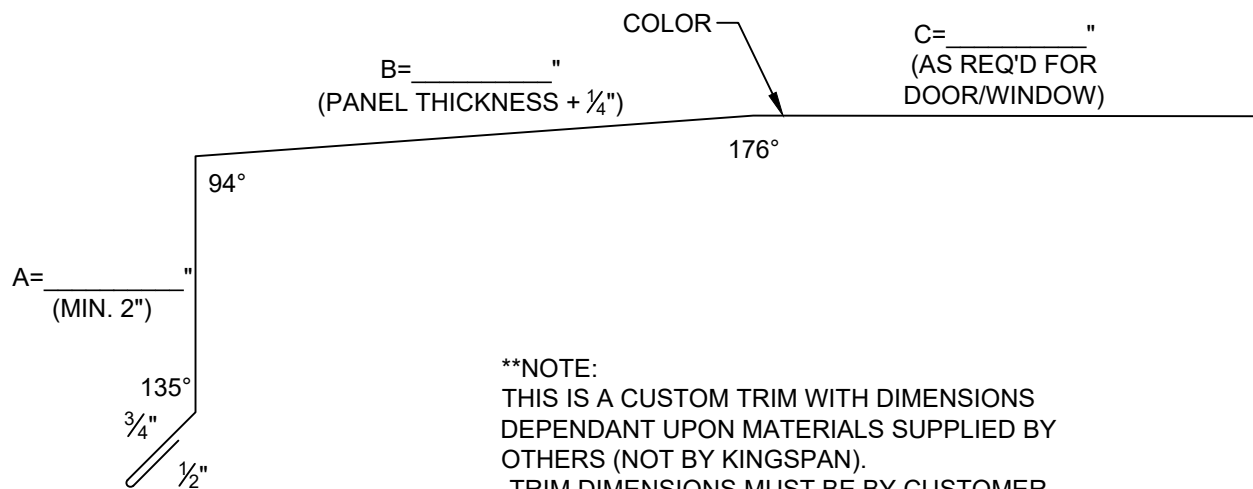

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CS-FO-06-KSV

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 0          | 5/31/24 |

SILL TRIM

DETAIL #: KS SERIES VERT

RELEASE: 2024

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)

